

Soft Seated Plug Valve



FULL BORE PTFE Sleeve



Comercial de Válvulas y Accesorios, S.A.
Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04
e-mail: info@cva.es
URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.

Soft Seated Plug Valve

GENERAL CHARACTERISTICS

- Regulation plug conical seat with PTFE sleeve.
- Minimum Pressure Drop
- Recommended to be used in viscous fluids lines as well as with gas (LPG). In general used in pipes until 1" diameter.
- Safety back seating plug design seals in fully open position.

CONNECTIONS

Manufactured UNTIL 2", threaded according the following:

- NPT, according ANSI B2.1
- BSP, according DIN 259

MATERIALS

Manufactured in two standard materials:

AC Type. In Carbon Steel UNE36011

SS Type. In Stainless Steel 316 Type

In all the cases the stem and the plug are made of in Stainless Steel 316. Sleeve and packing in PTFE.


RATING

TEMPERATURE °C (°F)	AC TYPE	SS TYPE
	CARBON STEEL	STAINLESS
	BAR (PSI)	
from -29 to 38 (-20 to 100)	102 (1480)	99 (1436)
250 (482)	83 (1204)	67 (972)




Soft Seated Plug Valve

Parts and materials

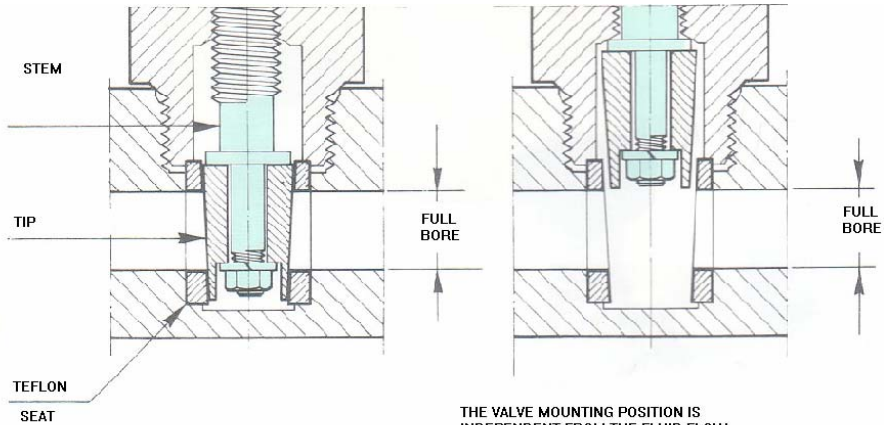

THE VALVE MOUNTING POSITION IS INDEPENDENT FROM THE FLUID FLOW DIRECTION

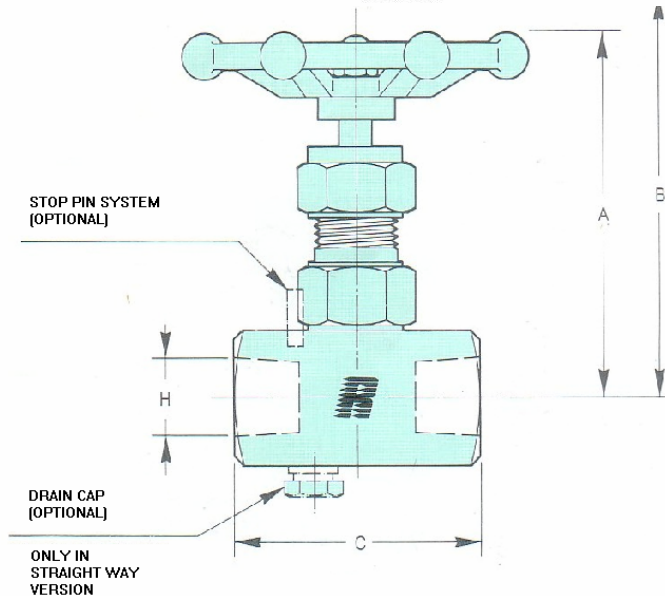

THREAD	BORE mm	DIMENSIONS			THREAD NPT CODE	THREAD BSP CODE
		A	B	C		
1/4	7	97	100	50	3200.02.NP	3200.02.BP
3/8	9	97	110	55	3200.03.NP	3200.03.BP
1/2	12	115	128	65	3200.04.NP	3200.04.BP
3/4	15	130	148	75	3200.05.NP	3200.05.BP
1	18	140	160	90	3200.06.NP	3200.06.BP

(*)Dimensions in mm



Comercial de Válvulas y Accesorios, S.A.
 Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
 08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04
 e-mail: info@cva.es
 URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.