

# Brass Pneumatic Piston Valve

---



## PISTON VALVE Type 925



Comercial de Válvulas y Accesorios, S.A.  
Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3  
08290 Cerdanyola del valles ( Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04  
e-mail: [info@cva.es](mailto:info@cva.es)  
URL: [www.jlx-valve.com](http://www.jlx-valve.com)

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.

# Brass Pneumatic Piston Valve

## GENERAL CHARACTERISTICS

Quick operation valve for the isolation of gauges in low pressure pneumatic circuits.

For the operation, the button just have to be pushed in order to allow the air flow and the measurement inside the instrument.

Once the button-pushing stopped, the air flow is automatically closed, isolating like that the gauge from the primary circuit. Light set up into zero point thanks to a system where the air goes outside the valve's pressure chamber.

## CONNECTIONS

Manufactured until 1/2", threaded according to the following:

NPT, according ANSI B2.1


BSP, according DIN 259

## MATERIALS

Manufactured in Brass, spring made of treated Steel and nitrile rings (NBR).

## RATING

25 bar to 100°C (362 PSI to 212°F)

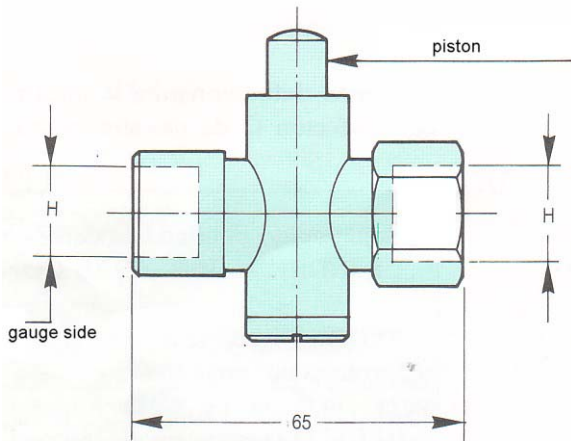

| CONNECTIONS |              |
|-------------|--------------|
| H           | CODES        |
| 1/2 BSP     | 925.04.BP.LA |
| 1/2 NPT     | 925.04.N.LAP |

