

Quick Coupling




45QC Type



Comercial de Válvulas y Accesorios, S.A.
Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04
e-mail: info@cva.es
URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.

Quick Coupling

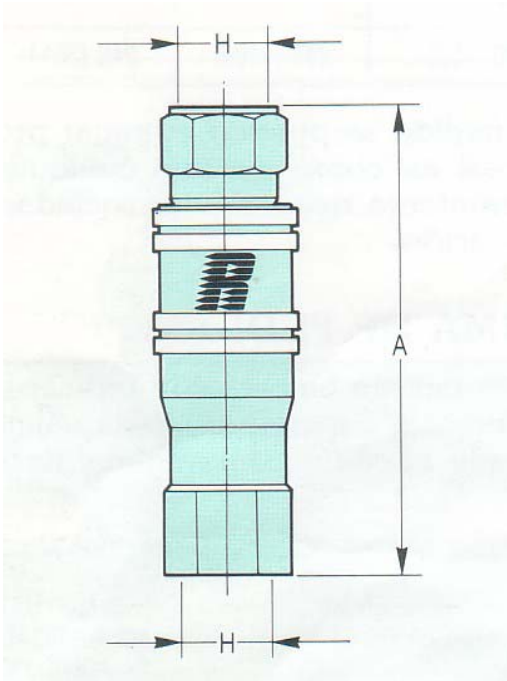

GENERAL CHARACTERISTICS

Quick connectors for oleohydraulics facilities, for pressures until 450 Bar.

Designed for an easy turn on and off, they have a double sealing O'Ring and safety ring shutoff.

CONNECTIONS

Manufactured in dimensions from 1/4" to 2" threaded BSP or NPT.

MATERIALS

Manufactured in two standard versions:

-AC SERIE in Carbon Steel UNE 36011

-SS SERIE in Stainless Steel 316 type

RATING

Maximum rating 450 Bar in 150°C (6530 PSI to 302°F)

THREAD F	A DIMENSION	CODES	
		AC SERIE	SS SERIE
1/4	70	45.02.BP.AC	45.02.BP.SS
3/8	81	45.03.BP.AC	45.03.BP.SS
1/2	93	45.04.BP.AC	45.04.BP.SS
3/4	114	45.05.BP.AC	45.05.BP.SS
1	130	45.06.BP.AC	45.06.BP.SS
1 1/4	143	45.07.BP.AC	45.07.BP.SS
1 1/2	161	45.08.BP.AC	45.08.BP.SS
2	182	45.09.BP.AC	45.09.BP.SS

(*)Dimensions in mm



Comercial de Válvulas y Accesorios, S.A.
Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04
e-mail: info@cva.es
URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.