


# Temporary Strainer

## ANSI 150-600 lbs

DN25–600 (1”-24”) Carbon and Stainless steel

---

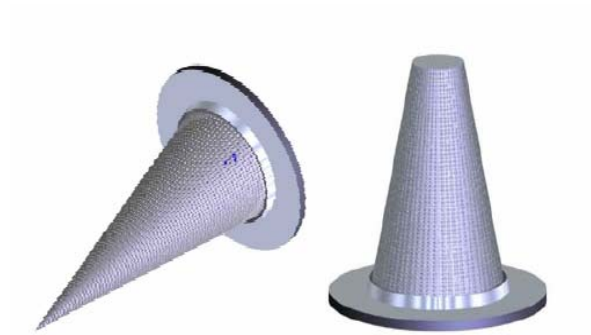

# Fig. TS415, TS430 & TS460

CE




Comercial de Válvulas y Accesorios, S.A.  
Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3  
08290 Cerdanyola del valles ( Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04  
e-mail: [info@cva.es](mailto:info@cva.es)  
URL: [www.jlx-valve.com](http://www.jlx-valve.com)

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.

# Temporary Strainer

## ANSI 150-600 lbs



*Parts and materials, Dimensions*

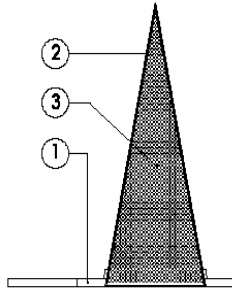

Item	Description	Material
1	Ring	ASTMA105 / AISI 304 / AISI 316
2	Perforated	AISI 304 / AISI 316
3	Wire mesh	AISI 304 / AISI 316

\*\*Items 1,2 and 3 could be delivered in Monel, Hastelloy or Inconel (always under request)

Perforation from 20 to 300 mesh

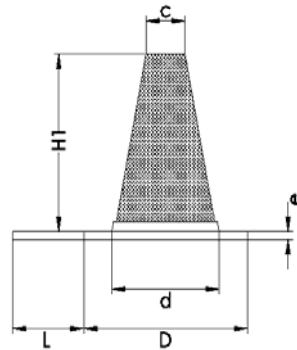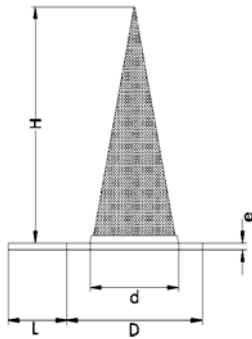

SIZE	ØD	Ød	Øc	e	H	H1	L		
							150 lbs	300 lbs	600 lbs
1" (DN 25)	51	22	20	3	80	60	100	110	110
1 1/4" (DN 32)	64	30	20	3	90	70	100	110	110
1 1/2" (DN 40)	73	35	20	3	100	80	100	110	110
2" (DN 50)	92	45	30	3	130	90	100	110	110
2 1/2" (DN65)	105	55	40	3	160	110	100	120	120
3" (DN80)	127	72	55	3	200	140	100	120	120
4" (DN100)	157	93	65	3	250	160	110	120	130
5" (DN125)	185	118	80	3	300	180	120	120	140
6" (DN150)	216	142	95	3	350	210	120	130	140
8" (DN200)	270	190	120	3	450	270	120	130	150
10" (DN250)	324	240	145	3	580	340	120	130	160
12" (DN300)	381	295	155	5	700	440	130	140	160
14" (DN350)	413	325	180	5	750	480	130	160	170
16" (DN400)	470	375	210	5	850	550	130	160	180
18" (DN450)	533	425	230	5	950	630	140	160	180
20" (DN500)	584	475	260	5	1100	700	150	170	190
24" (DN600)	692	575	310	5	1300	850	150	180	190

(\*)Dimensions in mm

\*\*To be installed between flanges RF, FF, RTJ and ANSI

\*\*Ask for higher ratings and other materials

Comercial de Válvulas y Accesorios, S.A.

Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3

08290 Cerdanyola del valles ( Barcelona ) – Spain Tel. 93 586 36 00 Fax 93 586 36 04

e-mail: [info@cva.es](mailto:info@cva.es)

URL: [www.jlx-valve.com](http://www.jlx-valve.com)

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.

