

Siphons

Carbon and Stainless Steel 1/2"



SIPHONS



Comercial de Válvulas y Accesorios, S.A.
Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04
e-mail: info@cva.es
URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.

Siphons

GENERAL CHARACTERISTICS

Siphons are protection elements mounted between the measurement device and the process line. They avoid the aggressive fluids direct contact which can damage the instrumentation. At the same time they act as a thermic barrier while favoring the heat dissipation and reducing the fluid "lash" effect.

Manufactured in Steel Seamless Pipe, $\frac{1}{2}$ " (21.3mm) and with thickness according to ANSI B36.10 and B36.19.

ENDS

Standard ones are manufactured threaded $\frac{1}{2}$ " NPT, according to ANSI B2.1 as well as with BW ends.

MATERIALS

Manufactured in Carbon Steel and in Stainless Steel 316. Carbon Steel siphons are supplied in yellow zinc passivated finish.


RATING

Temperatures and pressures according to pipe's characteristics.


Under request can be manufactured with Thread BSP and BSPT.

We can also manufacture siphons from whatever the forms and the dimensions.

Siphons could be also delivered with different fittings to gauge direct assembly.

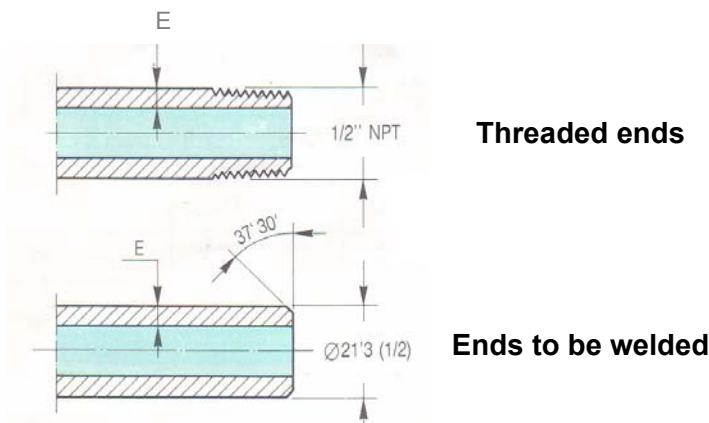

Siphons

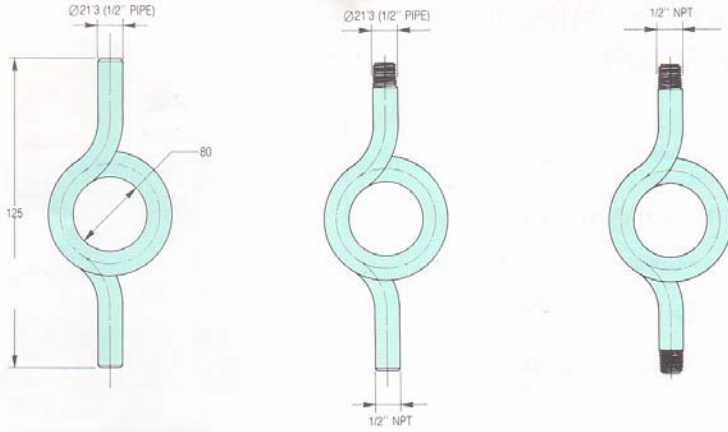

LPP: Welded ends

LRP: Mixed Version


LRR: Screwed Ends

Carbon Steel

Stainless Steel

SCHEDULE	THICKNESS E	CODES		
		LPP	LRP	LRR
40	2,7	40.LPP.10	40.LRP.10	40.LRR.10
80	3,7	80.LPP.10	80.LRP.10	80.LRR.10
160	4,8	160.LPP.10	160.LRP.10	160.LRR.10

SCHEDULE	THICKNESS E	CODES		
		LPP	LRP	LRR
40	2,7	40.LPP.10	40.LRP.10	40.LRR.10
80	3,7	80.LPP.10	80.LRP.10	80.LRR.10
160	4,8	160.LPP.10	160.LRP.10	160.LRR.10

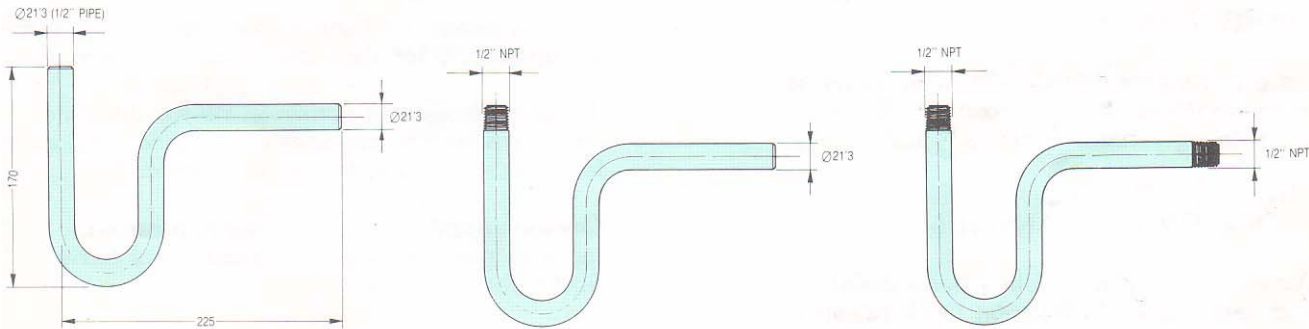

UPP: Welded ends

URP: Mixed Version

URR: Screwed Ends

Carbon Steel

Stainless Steel

SCHEDULE	THICKNESS E	CODES		
		UPP	URP	URR
40	2,7	40.UPP.10	40.URP.10	40.URR.10
80	3,7	80.UPP.10	80.URP.10	80.URR.10
160	4,8	160.UPP.10	160.URP.10	160.URR.10

SCHEDULE	THICKNESS E	CODES		
		UPP	URP	URR
40	2,7	40.UPP.10	40.URP.10	40.URR.10
80	3,7	80.UPP.10	80.URP.10	80.URR.10
160	4,8	160.UPP.10	160.URP.10	160.URR.10



Comercial de Válvulas y Accesorios, S.A.
 Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
 08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04

e-mail: info@cva.es
 URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.