

Y- Strainer
ANSI 150-600 lbs
DN50–300 (2”-12”) Cast Steel



FIJLY type “Y”




Comercial de Válvulas y Accesorios, S.A.
Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04
e-mail: info@cva.es
URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.

Y- Strainer

ANSI 150-600 lbs

Parts and materials, Dimensions

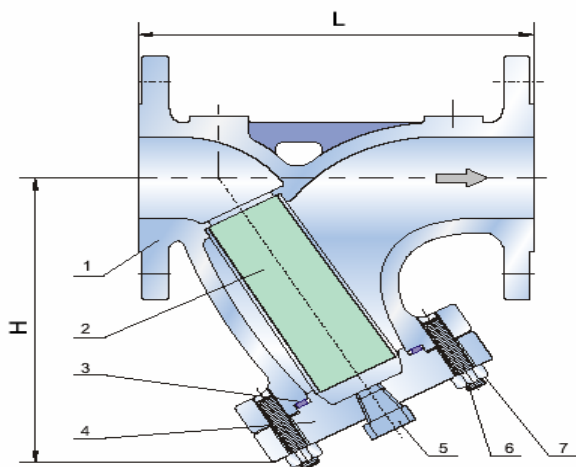

Item	Description	Material
1	Body	ASTM A216 GR. WCB / CF8 / CF8M
2	Screen	ASTM A276 Type 304 / 316
3	Gasket	304 + Graphite
4	Cover	ASTM A216 GR. WCB / CF8 / CF8M
5	Plug	ASTM A105 / 316
6	Cover Bolts	ASTM A193 GR.B7 / 316
7	Cover Bolts Nuts	ASTM A194 GR.2H / 316

SPECIFICATIONS

Design	ASME B16.34
Face to face	ASME B16.10
End Flange	ASME B16.5
Test	API 598

SIZE	150 lbs			300 lbs			600 lbs		
	L	H	Kg	L	H	Kg	L	H	Kg
2"	203	145	12	267	170	15	292	185	35
2.5"	216	183	18	292	185	18	330	200	40
3"	241	206	21	318	235	35	356	250	48
4"	292	228	32	356	290	51	432	300	90
6"	406	329	48	445	375	92	559	415	220
8"	495	440	105	559	450	182	660	490	360
10"	622	507	169	622	575	285	787	595	500
12"	699	594	215	711	665	307	838	680	781

(*)Dimensions in mm



Comercial de Válvulas y Accesorios, S.A.
 Polígono Industrial Polizur, Calle Bosc Tancat, 6 Nave 2 y 3
 08290 Cerdanyola del valles (Barcelona) – Spain Tel. 93 586 36 00 Fax 93 586 36 04
 e-mail: info@cva.es
 URL: www.jlx-valve.com

Remark: The dimensions of this catalogue are for reference only and it can change without previous notice.